



INDICATIVE PHOTO

General features : FTL020G012

- Self-supporting casing in zinc-plated metal sheet, which is coated with epoxy powder
- Front panel easy to be removed in order to guarantee an easy access to the components and a fast maintenance intervention
- Hermetic compressors with thermal motor protection
- Electronic board that can be programmed according to different user requirements
- Heat exchangers with copper and aluminium blocks
- Condensation by air (optional by water)
- Expansion by capillary tube or thermostatic valve
- Automatic defrosting with programmable run, duration and frequency settings "Off cycle defrosting (HBP), and hot gas defrosting (MBP, LBP)."
- Integral evaporating condensing water tray, or condensing water direct discharge
- Electronic control panel
- Cold room light with 2,5m long cable
- Door micro switch with 2,5m long cable
- Door heater cable for LBP items with 2,5m long cable
- High pressure switch
- Evaporating water tray
- Power supply cable (L=2,5m)
- Package included



Indicative photo

Product file : Refrigerating systems

Code	FTL020G012
Type	Compact
Mounting	Wall
Range	FT
Version	Plug-in
Expansion	Valve
Application	LBP
Gas	R452A
Net weight	114,5 kg
Ped	1
Defrost	Hot gas

Compressor

Type	Hermetic
Voltage	400/3/50
Displacement	53,2cm ³

Pipe fittings

Liquid diam.	-
Suction diam.	-

Absorptions

Power consumption	1458 W
Current consumption	3,5 A


Condenser

Fans no.	1
Diameter	350 mm
Air flow	2116 m ³ /h

Unit cooler

Fans no.	1
Diameter	350 mm
Air flow	2050 m ³ /h
Air throw	8 m

Technical drawing - FTL020G012

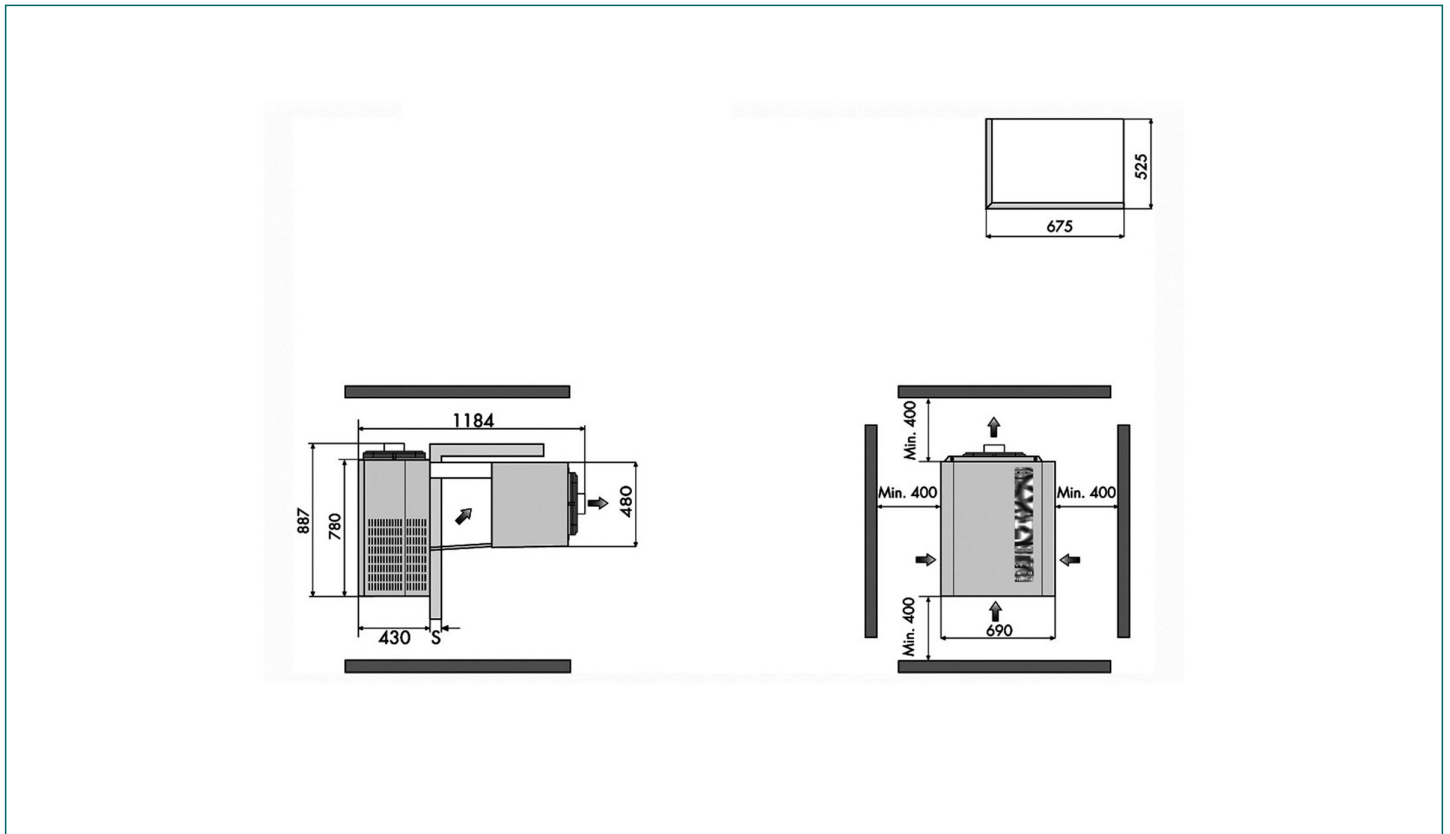

Refrigerating capacity table (watt) - Gas : R452A

Ta \ Tc	-25°C	-20°C	-15°C
25°C	1727 (15,1 m³)	2120 (26,3 m³)	2546 (47,5 m³)
32°C	1543 (11,1 m³)	1914 (19,4 m³)	2314 (31,8 m³)
43°C	1243 (7,3 m³)	1578 (16,4 m³)	1938 (22,6 m³)

Values referred to :

- Suction gas : +20°C
- Subcooling : 0K
- Superheat : 100%
- Compressor absorption :
 - Te -5°C (HBP); Tcond +50°C
 - Te -10°C (MBP); Tcond +50°C
 - Te -30°C (LBP); Tcond +50°C