



INDICATIVE PHOTO

General features : SFL003G011

- Self-supporting casing in zinc-plated metal sheet, which is coated with epoxy powder and easily removable panels for fast access to components during inspection or maintenance operations
- Hermetic compressors with thermal motor protection
- Heat exchangers with copper and aluminium blocks
- Capillary expansion up to the model 54
- Condensation by air (optional by water)
- Automatic defrosting with programmable run, duration and frequency settings
- Electronic board that can be programmed according to different user requirements
- Control panel installed in a remote position
- Electronic control panel
- High pressure switch
- Remote control panel (5m)
- Door micro switch with 2,5m long cable
- Cold room light with 2,5m long cable
- Evaporating water tray
- Door heater cable for LBP items with 2,5m long cable
- Power supply cable (L=2,5m)
- Mounting set and overflow tube
- Package included



Indicative photo

Product file : Refrigerating systems

Code	SFL003G011
Type	Compact
Mounting	Ceiling
Range	SF
Version	-
Expansion	Valve
Application	LBP
Gas	R452a
Net weight	51,4 kg
Ped	0
Defrost	Hot gas

Compressor

Type	Hermetic
Voltage	220-240/1/50
Displacement	16,8cm ³

Pipe fittings

Liquid diam.	-
Suction diam.	-

Absorptions

Power consumption	598 W
Current consumption	2,9 A


Condenser

Fans no.	1
Diameter	254 mm
Air flow	546 m ³ /h

Unit cooler

Fans no.	1
Diameter	200 mm
Air flow	510 m ³ /h
Air throw	3 m

Technical drawing - SFL003G011

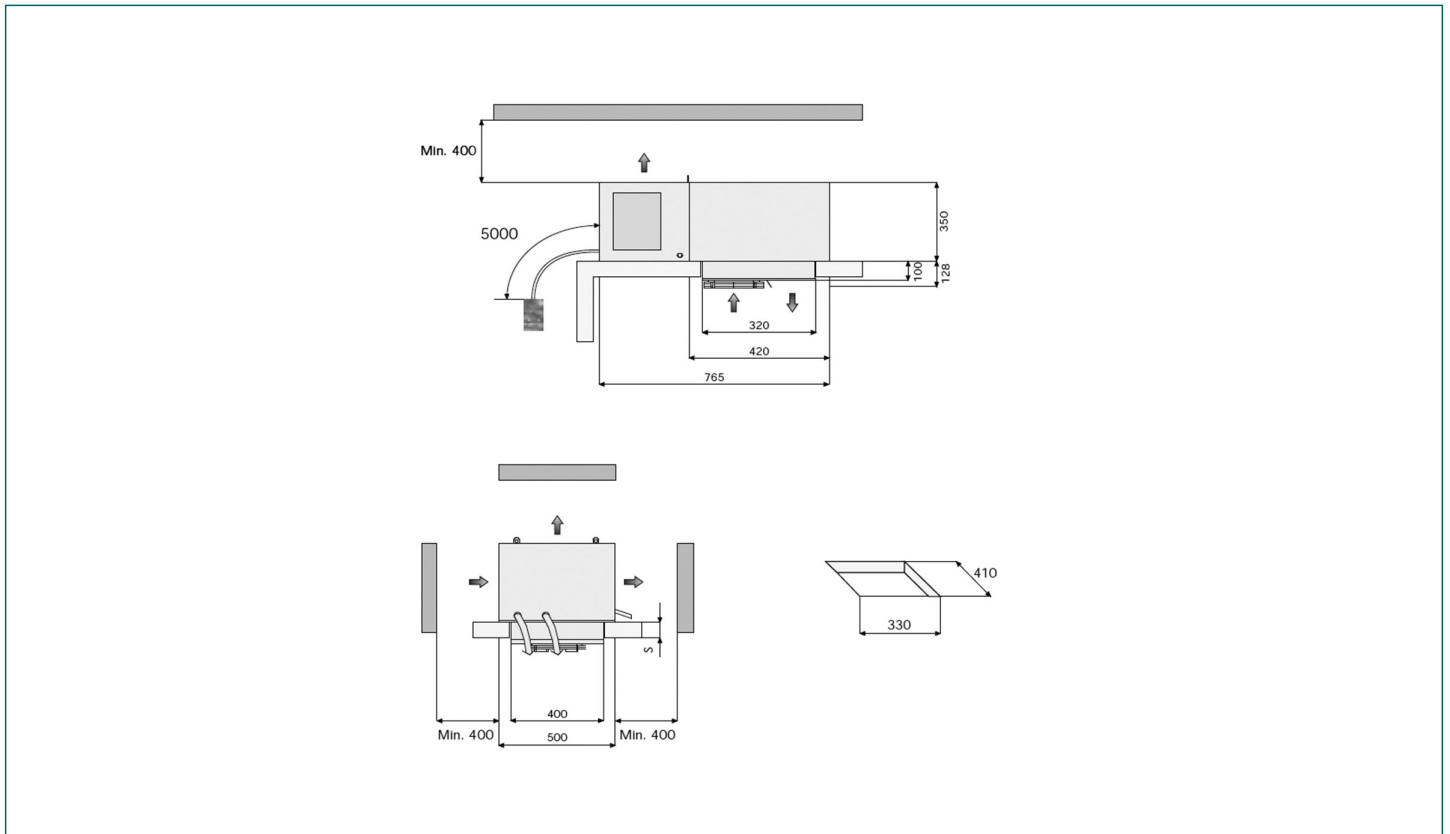

Refrigerating capacity table (watt) - Gas : R452a

Ta \ Tc	-25°C	-20°C	-15°C
25°C	532 (2,3 m³)	640 (3,3 m³)	759 (4,3 m³)
32°C	486 (1,8 m³)	586 (2,8 m³)	693 (3,5 m³)
43°C	408 (1,4 m³)	493 (2 m³)	582 (2,5 m³)

Values referred to :

- Suction gas : +20°C
- Subcooling : 0K
- Superheat : 100%
- Compressor absorption :
 - Te -5°C (HBP); Tcond +50°C
 - Te -10°C (MBP); Tcond +50°C
 - Te -30°C (LBP); Tcond +50°C