



AIR CONDITIONING



REFRIGERATION



HEATING



# micro-v <sup>i4</sup>

## INTELLIGENT CONDENSATE REMOVAL PUMP

The logical step in pump evolution – the new Micro-v i<sup>4</sup> is what you have always wanted from a mini pump.



14.5L/h max. flow



10m max. rec. head (flow rate 6L/h)





19dB(A)

### KEY FEATURES

- Continuous rating
- Soft start
- No breather tube
- Plug & Play
- UniVolt

### SUITABILITY

- Up to 19.3kW / 66,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units
- ✓ **Perfect for...** installing directly inside the unit

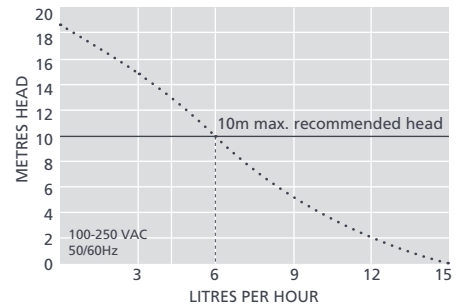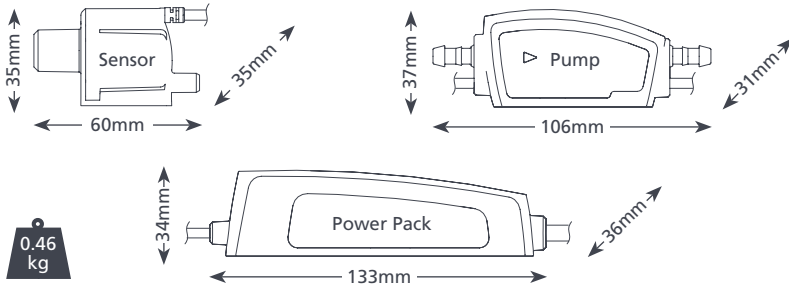

### MICRO-V i<sup>4</sup> SPECIFICATIONS

Max. flow	14.5L/h @ 0 head
Max. rec. head	10m
Max. suction lift	2m
Sound level@1m	19dB(A)
Power supply	100-250 VAC, 0.45A, 50/60Hz
Rated Class	Continuous II appliance <input type="checkbox"/>
Max. unit output	19.3kW / 66,000Btu/h
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IP24
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

### MICRO-V i<sup>4</sup> OPTIONS

Micro-v i <sup>4</sup> (Europe)	FP1200
---------------------------------	--------

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
Rubber adaptor	FP2002
90° long arm bend	FP2006
Tube To Soil Stack Adaptor	FP2038

### IN THE BOX

Micro-v i<sup>4</sup> pump includes: Water sensor fitted with 850mm interface cable terminated with a plug (removable sensor bracket attached)

- Adaptive pump fitted with 1m interface cable and 1m x 6mm violet tube (anti siphon device fitted)
- Universal voltage power supply fitted with 200mm plug and play fly lead connected to 1.4m power cable combined power and high water level cores
- AV Pump bracket & sleeve
- 1 amp fuse • Inline filter • 90° elbow drain connector & fixing kit • Install manual

- Download manual at [aspenspumps.com](http://aspenspumps.com)
- View install video at [aspenspumps.com](http://aspenspumps.com)

For more installation accessories take a look at our Aspen Xtra range

[www.aspenspumps.com/microv.html](http://www.aspenspumps.com/microv.html)  
[www.aspenspumps.com/i4.html](http://www.aspenspumps.com/i4.html)

Information correct at time of going to press.



[aspenspumps.com](http://aspenspumps.com)

+44 (0)1323 848842

[sales@aspenspumps.com](mailto:sales@aspenspumps.com)

reliable | silent | simple